




CASTOHN® CASTOHN® CASTOHN® CASTOHN® CASTOHN®


# READ BEFORE INSTALLING

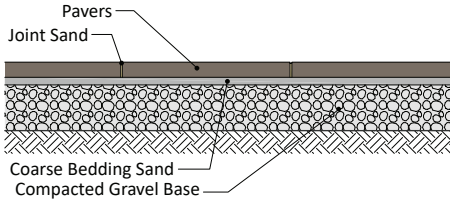

**Sand Set**



**Pedestal Set**

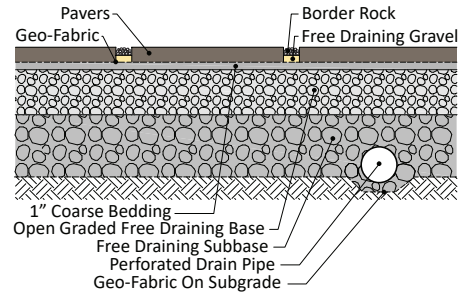

**Permeable Set**

Installations shown above are examples only. Consult a design professional for site specific installation requirements.

## Installation Quick Tips

Installation should meet all local building code requirements.

### Handling Olympic Pavers

- Handle with care. Avoid damaging Olympic Pavers with forklifts and lifting equipment/tools.
- Store pallets of pavers in single-height rows. **DO NOT STACK PALLETS OF PAVERS**
- Do not push pallets against each other with forklifts or other equipment.

### Installation

- Lift pavers carefully by hand or with lifting equipment. Do not drag one paver across the top of another paver. Lift in way that will not chip the edges of the pavers.
- Install with a minimum of 1/4" joints to ease installation and alignment. Proper joints will help with alignment and prevent chipping.
- Avoid "bumping" or contacting adjacent pavers when installing. "Bumping" pavers can cause edge chips and scratches on the surface.
- Protect pavers during the construction process. Brush off all dirt, sand and gravel from installed pavers and cover with a protective landscape fabric or other protective material that will not stain the pavers.

### Cleaning

- Wash all dirt and construction debris with the mildest cleaning method that works. Test clean a small inconspicuous area to determine what method works best before cleaning the entire project.
- CAUTION – Some cleaning techniques and products can damage the surface of the pavers and alter the appearance. Castohn does NOT recommend the use of a pressure washer to clean Olympic Pavers.
- If using polymeric sand, ensure pavers are thoroughly clean and dry prior to sealing.


### Sealing

- Olympic Pavers can be installed and left unsealed in many applications. However, exterior applications will weather over time and age. Some sealers will help protect the surface from water penetration and even enhance the color of the pavers. Some sealers can also help with preventing staining from food or beverage spills.
- If a sealer is to be used, always test a small inconspicuous area with the sealer to ensure it will perform as anticipated. The WRONG sealer can negatively impact the appearance of the Olympic Paver installation. Always test and follow manufacturer's recommendations for installing the sealer.

### Joint Sand

- The usage of joint sand can be tricky with high end pavers like these. We do not recommend most polymeric joint sands for this exposed sand product as they may cause residual hazing on the surface. Please consult with your Castohn representative for further information.

## Tools



**Large Slab Lifter**



**Slab Lifter**



**Ergo Assist XL**



**Ergo Assist**